



### Description

Alloy Thermal-Link / Alloy Thermal Cutoff (ATCO) is defined as a non-resettable protective device functioning one time only. It is widely used in electrical equipment. Normally, thermal element is jointed to the two electrode leads. Under abnormal conditions, when the temp. reaches to the fusing temp. of DC-ATCO, the thermal element melts and quickly retracts to the two electrode lead ends with the aid of the flux resin and disconnects the circuit completely.

### Features

- Non-Resettable
- High Accuracy of Functioning Temp.
- DC 200 A
- RoHS & REACH Compliant

### Applications



- EV Battery Modules
- Power Supplies

### Customization

- Rated Functioning Temp.
- Shape of Electrode Leads

### Dimensions (mm)

### Structure Diagrams

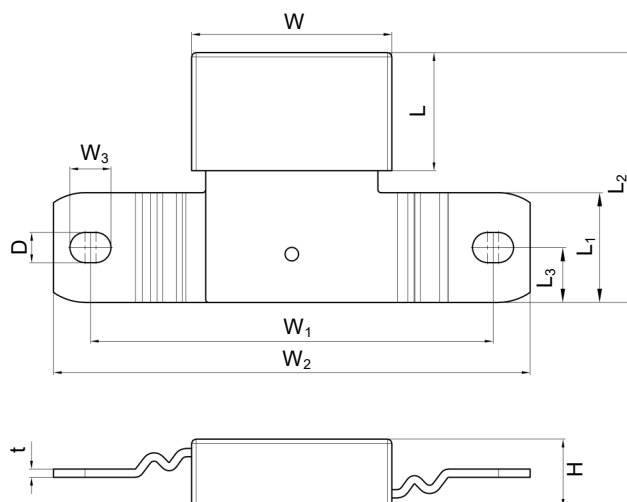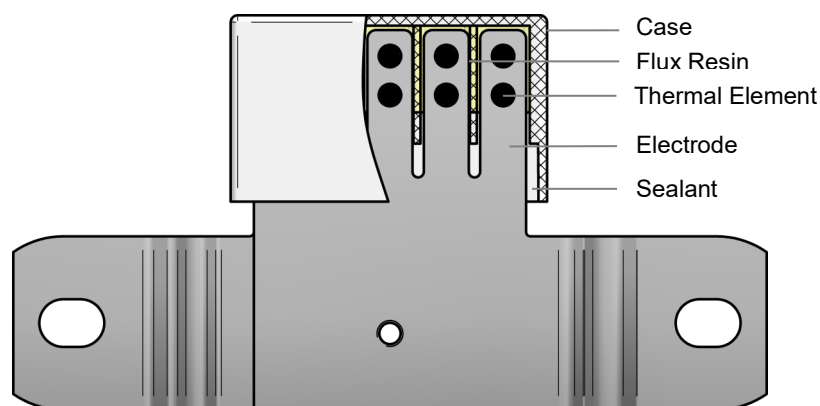


L	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	W	W <sub>1</sub>	W <sub>2</sub>	W <sub>3</sub>	D	H	t
21.5 ± 0.5	20.0 ± 0.2	45.5 ± 2.0	10.0 ± 0.2	36.5 ± 0.5	73.4 ± 2.0	86.9 ± 2.0	7.50 ± 0.15	5.5 ± 0.2	12.4 ± 0.5	1.50 ± 0.05

**Part Numbering System**

DC-ATCO - TB 102 - U H Z

DC-ATCO

DC-ATCO

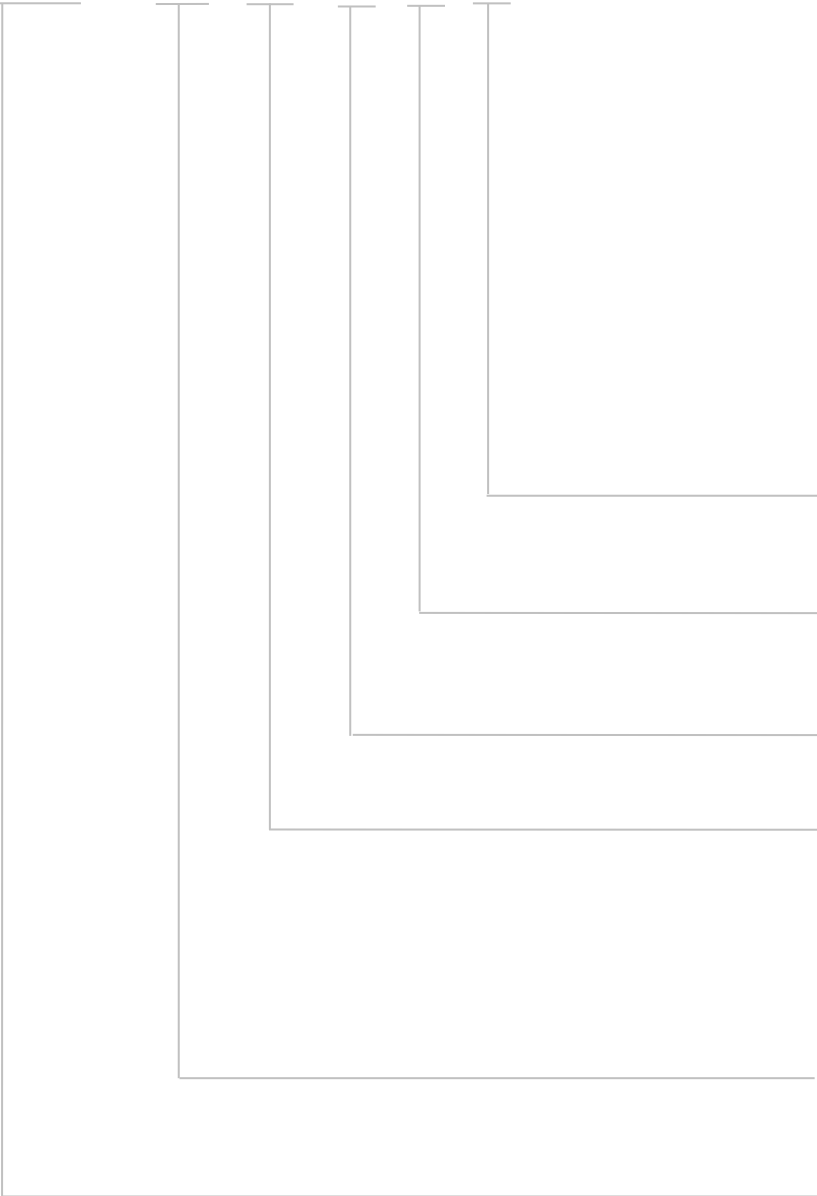

**Minimum Breaking Current (A)**

Z: Without Inbuilt Fuse

**Rated Voltage (VDC)**

H: 100 VDC

J: 125 VAC

**Rated Current (A)**

U: 200

**Functioning Temperature (°C)**

102

115

125

130

136

**Series**

TB

**Product Category**

DC Alloy Thermal-Link


## Glossary

Item	Description
<b>TCO</b>	<b>Thermal-Link</b> A non-resettable device incorporating a THERMAL ELEMENT which will open a circuit once only when exposed for a sufficient length of time to a temperature in excess of that for which it has been designed.
<b>ATCO</b>	<b>Alloy Thermal-Link</b> Alloy Type Thermal-Link, Alloy is the thermal element.
<b>DC-ATCO</b>	<b>DC-Alloy Thermal-Link</b> Direct Current Alloy Thermal-Link.
<b><math>T_f</math></b>	<b>Rated Functioning Temp.</b> The temperature of the Thermal-Link which causes it to change the state of conductivity with a detection current up to 10 mA as the only load. Tolerance: $T_f +0 / -10$ °C (GB 9816, EN 60691, K60691). Tolerance: $T_f \pm 7$ °C (J60691).
<b>Fusing Temp.</b>	The temperature of the Thermal-Link which causes it to change its state of conductivity is measured with silicone oil bath in which the temperature is increased at the rate of 0.5 °C to 1 °C / minute, with a detection current up to 10 mA as the only load.
<b><math>T_h</math></b>	<b>Holding Temp.</b> The Maximum temperature at which a Thermal-Link will not change its state of conductivity when conducting rated current for 168 hours.
<b><math>T_m</math></b>	<b>Maximum Temp. Limit</b> The temperature of the Thermal-Link stated by the manufacturer, up to which the mechanical and electrical properties of the Thermal-Link having changed its state of conductivity, will not be impaired for a given time.
<b><math>I_{min}</math></b>	<b>Minimum Breaking Current</b> The minimum current that Fuse requires after the Alloy of Thermal-Link opens in the circuit.
<b><math>I_r</math></b>	<b>Rated Current</b> The current used to classify a Thermal-Link, which is the maximum current that Thermal-Link allows to carry and is able to cut off the circuit safely.
<b><math>U_r</math></b>	<b>Rated Voltage</b> The voltage used to classify a Thermal-Link, which is the maximum voltage that Thermal-link allows to carry and is able to cut off the circuit safely.

### Specifications


Model	$T_f$	Fusing Temp.	$T_h$	$T_m$	$I_r$	$U_r$	RoHS
	(°C)	(°C)	(°C)	(°C)	(A)	(V)	REACH
TB102-UJZ	102	98 ± 3	57	180	200	AC 125	●
TB102-UHZ					200	DC 100	●
TB115-UJZ	115	111 ± 3	70	180	200	AC 125	●
TB115-UHZ					200	DC 100	●
TB125-UJZ	125	121 ± 3	80	180	200	AC 125	●
TB125-UHZ					200	DC 100	●
TB130-UJZ	130	125 ± 3	85	180	200	AC 125	●
TB130-UHZ					200	DC 100	●
TB136-UJZ	136	131 ± 3	91	180	200	AC 125	●
TB136-UHZ					200	DC 100	●

### Marking

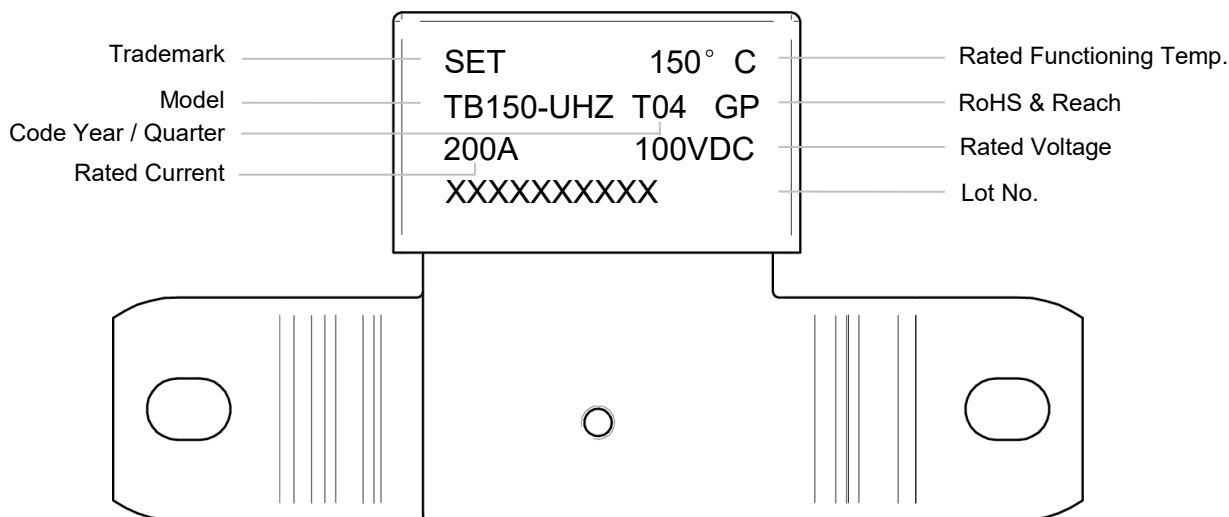

## Product Current-Time Curve

This is an illustrated curve, describing the opening time at Multi-times rated current in the condition of the room Temp. 25 °C. (This curve is for reference only)

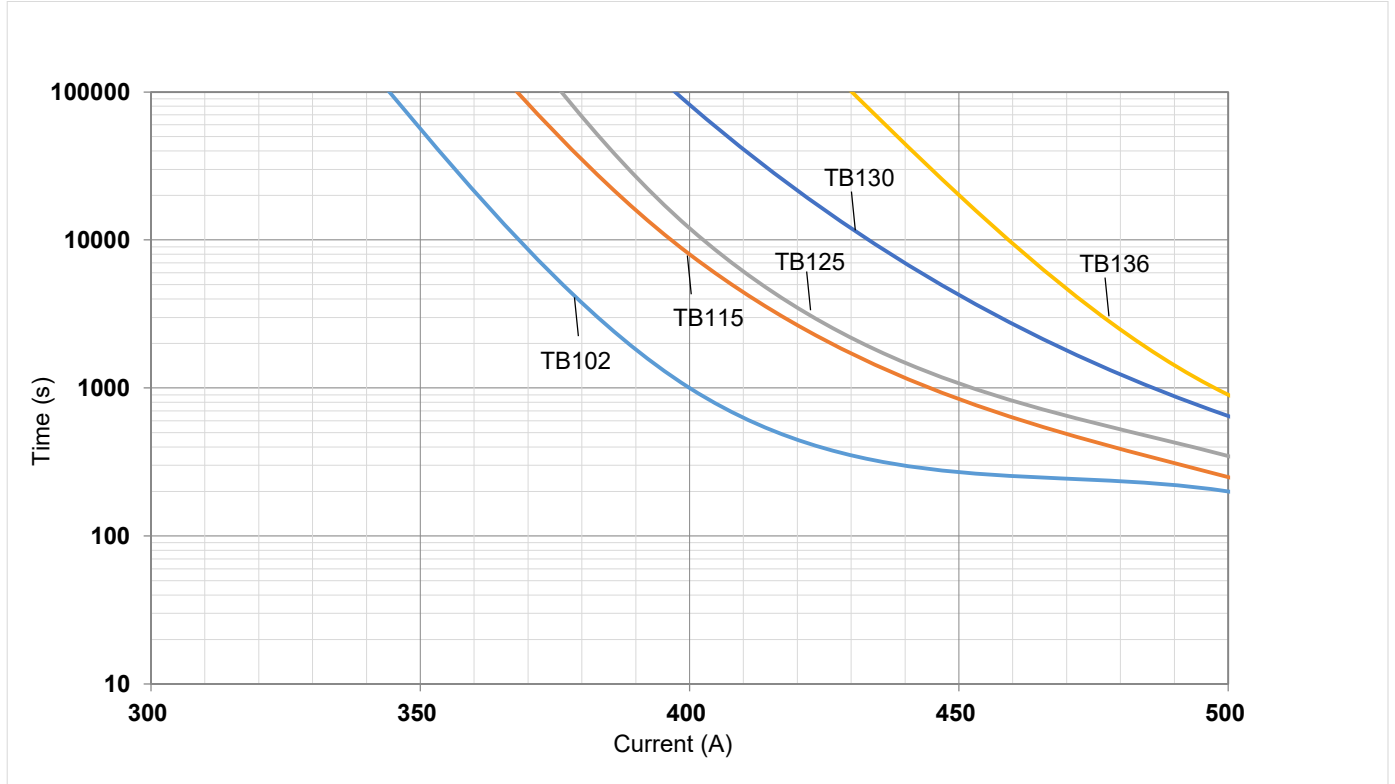

DC-ATCO

DC-ATCO



# ATTENTION

## Usage

1. When atmosphere pressure is from 80 kPa to 106 kPa, the related altitude shall be from +2000 m to - 500 m.
2. Operating voltage less than rated voltage of DC-ATCO, operating current less than rated current of DC-ATCO.
3. Do not touch the DC-ATCO body or lead wires directly when power is on, to avoid burn or electric shock.

## Replacement

DC-ATCO is a non-repairable product. For safety sake, it shall be replaced by an equivalent DC-ATCO from the same manufacturer, and mounted in the same way.

## Storage

Do not store the DC-ATCO at the high temp., high humidity or corrosive gas environment. The product shall be stored at  $25 \pm 5$  °C and  $\leq 70\%$  RH, avoid direct sunlight and shall use them up within 1 year after receiving the goods.

## Installation

### Make Sure the Temp. of Installation Position

1. It is recommended that a dummy DC-ATCO with inbuilt thermo-couple shall be used to determine the proper temp.
2. The terminal product should be tested to ensure that potential abnormal conditions do not cause ambient temp. to exceed the  $T_m$  of the DC-ATCO.
3. Mount the DC-ATCO at the location where Temp. rises evenly.

**Installation position of mechanical performance requirements.**

1. Do not locate the DC-ATCO in a place where severe vibration always occurs.
2. The seal or body of DC-ATCO must not be damaged, burned or over heated.

**Mechanical Connection**

1. Choose proper screw to lock.
2. To prevent loosening, please add gasket and use proper screw when installing the product. Recommended M5 screws, make sure the torque from 3 to 4 N · m.
3. If adding terminals to the electrode leads, do not adhere foreign materials like oil on the terminals or electrode leads and please use the terminal with cross section area 95 mm<sup>2</sup> (recommended), otherwise the terminal parts may have abnormal heating.

### Packaging Information

Item	Tray	Carton
Dimensions (mm)	434 × 232 × 18	450 × 245 × 200
Quantity (PCS)	10	100
Gross Weight (kg)		7.6 ± 10%

DC-ATCO

DC-ATCO

