Low Voltage Fuses (LV Fuses)

LFR10-xA04-y Series

Dimensions (mm)

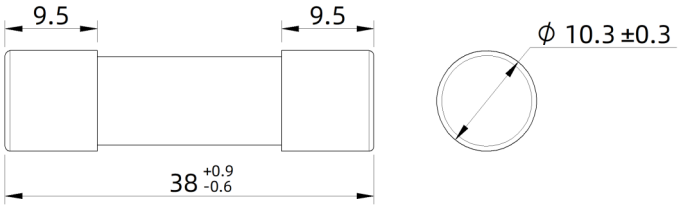

Applications

- SPD Protection
- TVSS Products

Key Features

- Rated Voltage: 400 VAC
- Breaking Capacity: 50 kA
- Fusing Characteristics: High Speed Fuse
- Utilization Category: aR
- Good Current Limiting Capability
- Body Size: ⌀10.3 x 38 mm
- RoHS and REACH Compliant, Pb Free

Agency Information

Agency Symbol	Standards	The File No. and certification No. obtained by SETsafe | SETfuse	Utilization Category
TÜV	EN 60269-4	B 107221 0015	aR
CE	EN 60269-4	N8A 107221 0016	aR

Matching Fuse Holder

Model: CFH10M1P

Part Numbering System

LFR10 - xA04 - y

- Mounting
  y: CF: Cylindrical Ferrule
- Rated Voltage
  04: 400 VAC
- Rated Current
  x: 32 A、40 A、50 A
- Series

Specifications

Model	Rated Voltage *U*n	Rated Current	Nominal Discharge Current (8/20 μs) /n	Maximum Discharge Current (8/20 μs) /max	Breaking Capacity /1	TÜV	CE	RoHS REACH Pb-free
	(VAC)	(A)	(kA)	(kA)	(kA)	TUV	CE	
LFR10-32A04-CF	400	32	10	13	50	●	●	●
LFR10-40A04-CF	400	40	15	19	50	●	●	●
LFR10-50A04-CF	400	50	20	26	50	●	●	●

Note: 1.“●”: Certification Obtained, RoHS and REACH Compliant, Pb Free.

All Rights Reserved by Xiamen SET Electronics Co., Ltd. 2024-2026 V1.0

Time-Current Characteristics (For Reference Only)

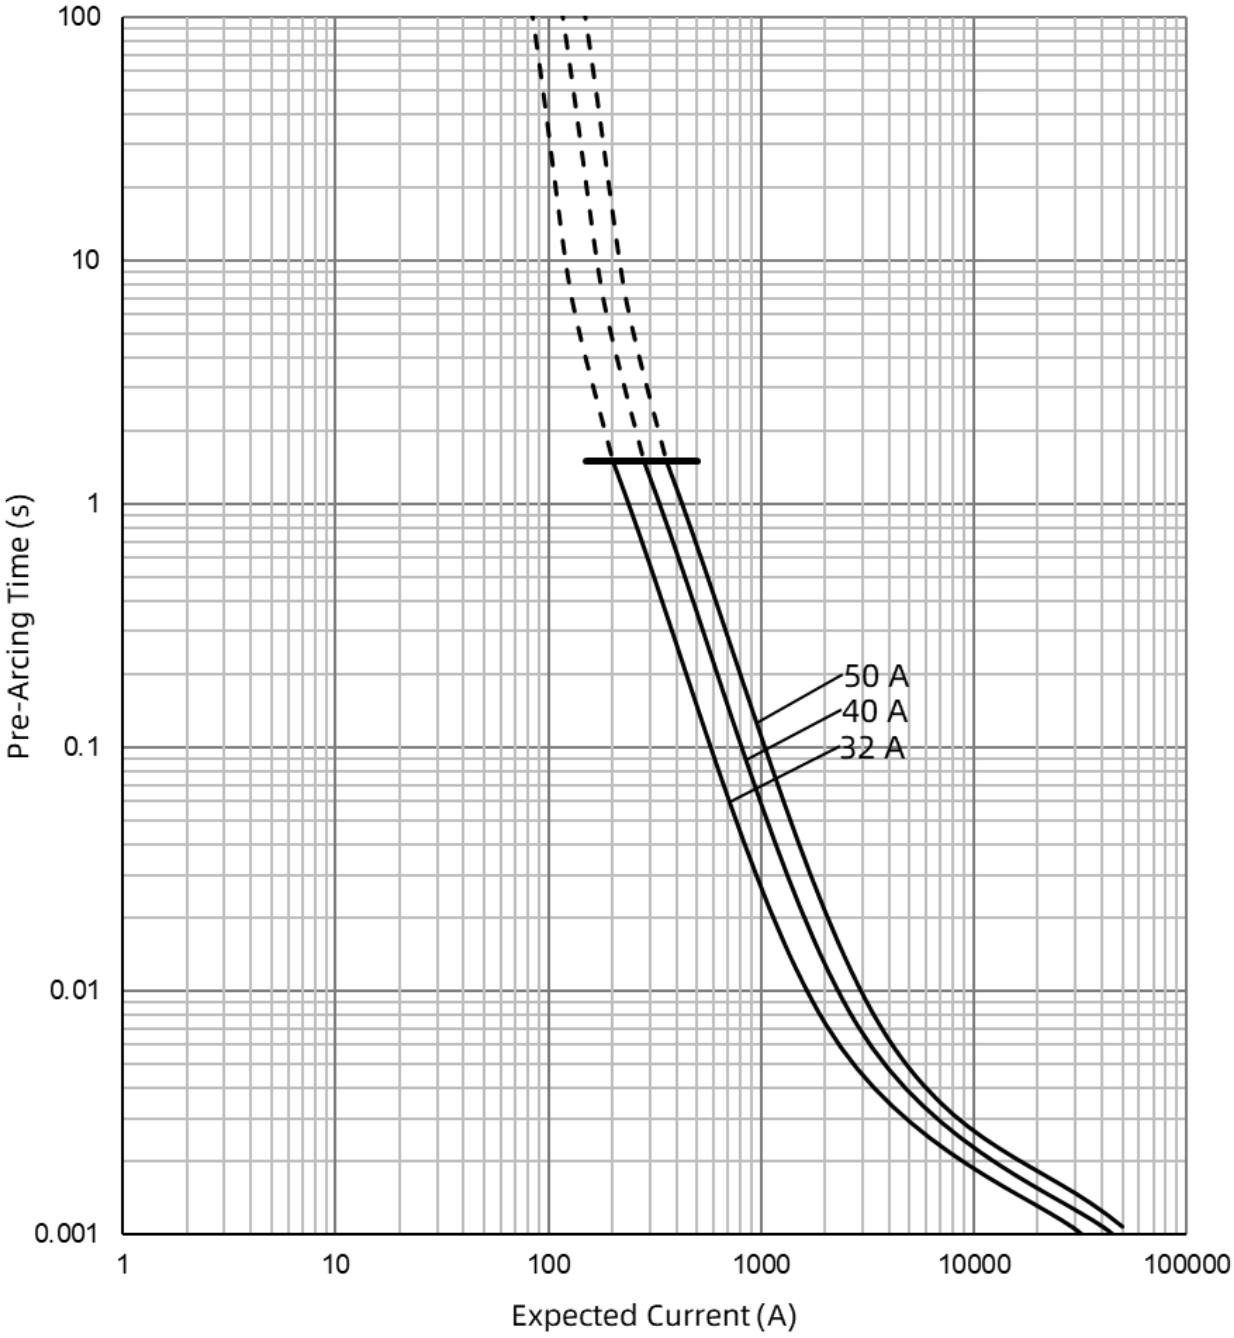

All Rights Reserved by Xiamen SET Electronics Co., Ltd. 2024-2026 V1.0

Truncated Current Curve (For Reference Only)

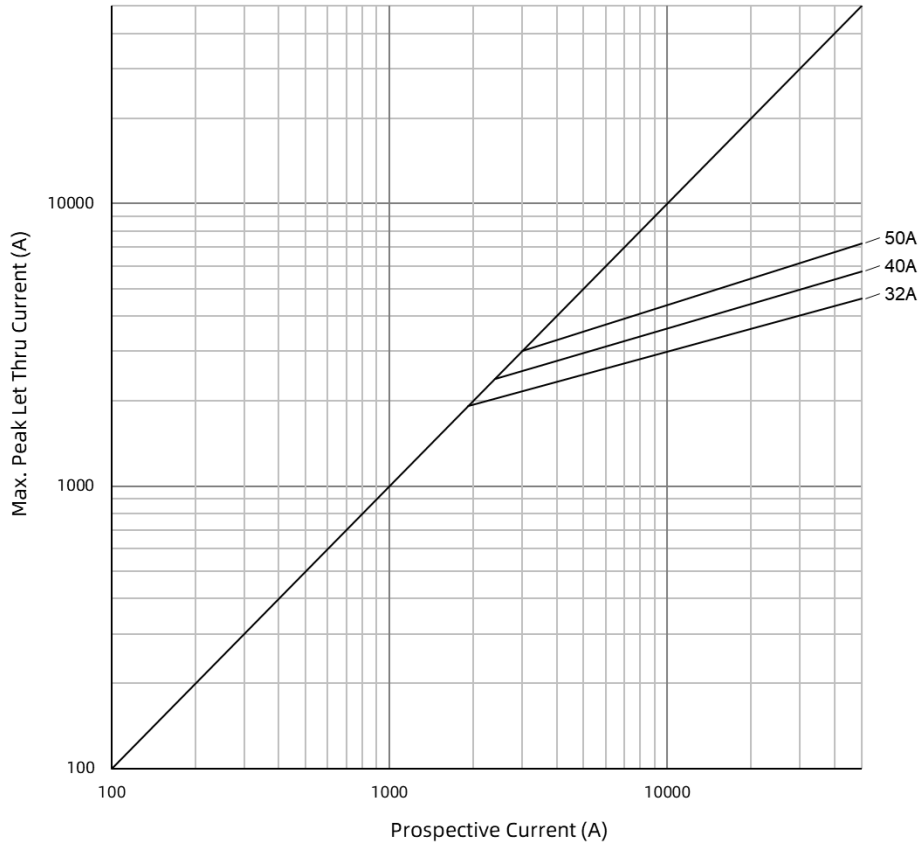

Packaging

Item	Pearl Cotton Pallet		Carton
Product Quantity (PCS)	60		420
Product Weight (g)	11 x (1±10%)	Gross Weight (kg)	5.4 x (1±10%)

Packaging Drawing:

Unit: mm

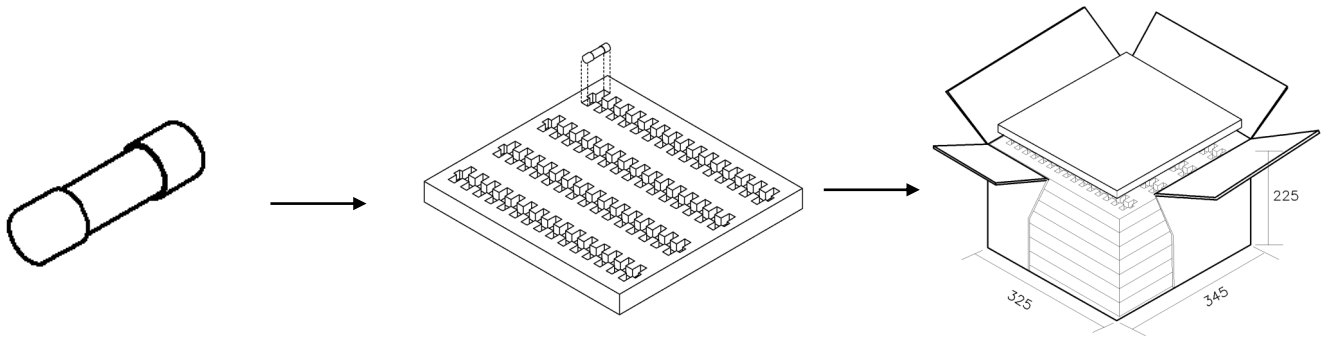

60 PCS / Pallet

7 Pallet / Carton

All Rights Reserved by Xiamen SET Electronics Co., Ltd. 2024-2026 V1.0

Power Dissipation Curve (For Reference Only)

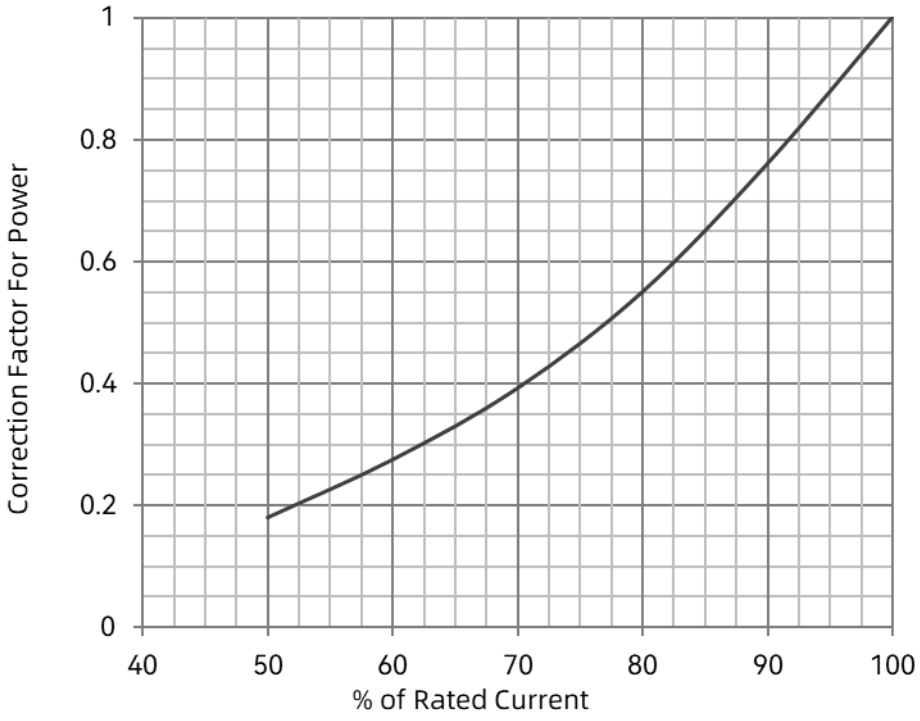

Rated Current Derating Curve

Ambient Temperature (For Reference Only)

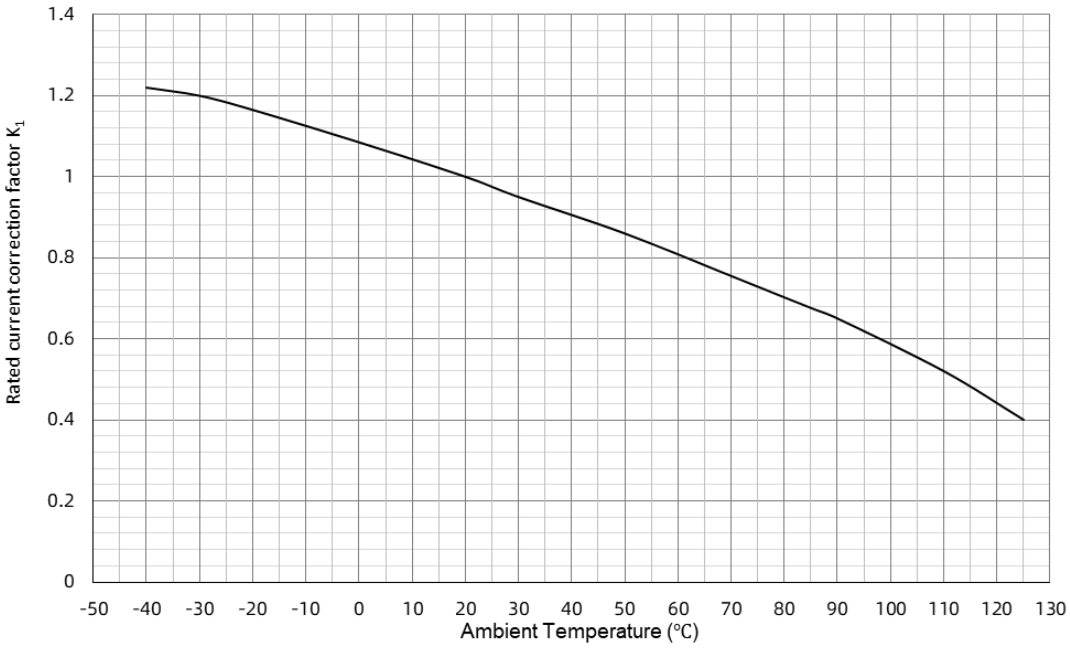

All Rights Reserved by Xiamen SET Electronics Co., Ltd. 2024-2026 V1.0

Connecting Conductor (For Reference Only)

The current density of copper bar for fuse installation is suggested to be 1.3 A/mm^2. If the carrying current density of copper bar is greater than 1.3 A/mm^2, it is recommended to reduce the rated current of fuse appropriately.

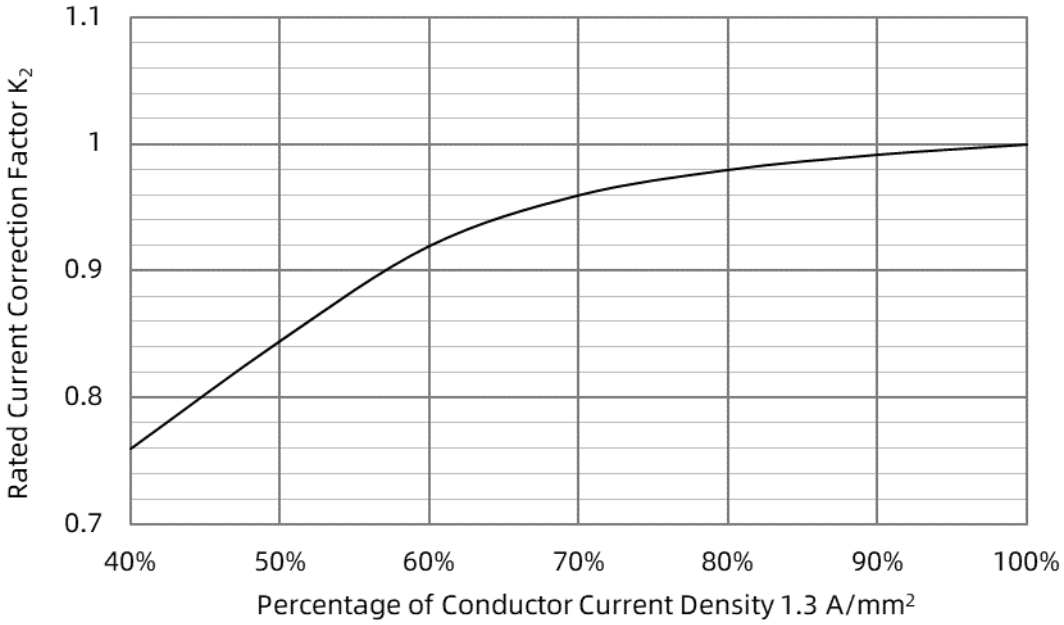

Cooling Air (For Reference Only)

When the fuse operates in the environment with cooling air, the rated current value of the fuse needs to be corrected.

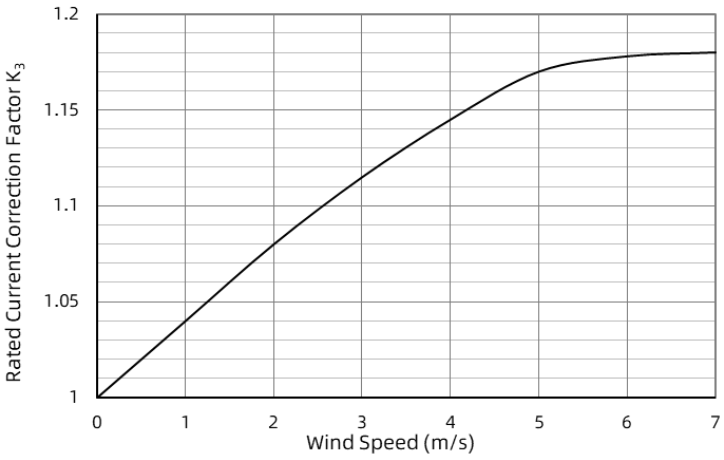

All Rights Reserved by Xiamen SET Electronics Co., Ltd. 2024-2026 V1.0

Altitude (For Reference Only)

Altitude (m)	Derating Factor K_4
2000	1.000
2500	0.975
3000	0.950
3500	0.925
4000	0.900
4500	0.875
5000	0.850

Rated Current:

$$I_n \geq \frac{K_0 I_C}{K_1 K_2 K_3 K_4 K_5}$$

I_c — Long-term continuous operating current

K_0 — Reliability factor: 1.2 (Reference DL/T 5044-2014)

K_1 — Ambient temperature correction factor

K_2 — Correction factor for connecting conductors

K_3 — Cooling air correction factor

K_4 — Altitude correction factor

K_5 — Closed environment correction factor, for the better heat dissipation conditions of the box to take 0.9 ~ 0.95, while for the poorer take 0.8

All Rights Reserved by Xiamen SET Electronics Co., Ltd. 2024-2026 V1.0

ATTENTION

Replacement

The fuse is a non-resettable product, for safety reasons, please ensure that the spare fuse is the same model.

Installation Position

Do not install the fuse on an assembly that may often subject to severe continuous vibration or with corrosive gases (NH_3, SO_2, Cl_2 etc.).

Transportation

During packaging and transportation, rain and snow and mechanical damage shall be avoided.

Storage Conditions and Effective Date

- Storage temperature: -10 ° C~40 ° C.
- Storage humidity: ≤ 75%RH.
- Sealed in a place with no sunshine no pollution and without corrosive gases(NH_3,SO_2,Cl_2, etc.).
- Validity period: 12 consecutive months after you receive it.

All Rights Reserved by Xiamen SET Electronics Co., Ltd. 2024-2026 V1.0

Glossary

Item	Description
Fuse	Device that by the fusing of one or more of its specially designed and proportioned components opens the circuit in which it is inserted by breaking the current when this exceeds a given value for a sufficient time. —(IEC 60269-1)
Rated Current of a fuse-link I_n	Value of current that fuse-link can carry continuously without deterioration under specified conditions. —(IEC 60269-1)
Prospective Current (of a circuit and with respect to a fuse)	Current that would flow in the circuit if each pole of the fuse were replaced by conductor of negligible impedance. —(IEC 60269-1)
Rated Voltage U_n	A maximum open circuit voltage in which a fuse can be used, yet safely interrupt an overcurrent. Exceeding the voltage rating of a fuse impairs its ability to clear an overload or short circuit safely. —(IEC 60269-1)
Ampere Squared Seconds I^2t	The melting, arcing, or clearing integral of a fuse, termed I^2t, is the thermal energy required to melt, arc, or clear a specific current. It can be expressed as melting I^2t, arcing I^2t or the sum of them, clearing I^2t. —(IEC 60269-1)
Time-current Characteristics	Current giving the time, e.g. pre-arcing time or operating time as a function of the prospective current under stated conditions of operation. —(IEC 60269-1)
Breaking Capacity	Value of prospective current that a fuse is capable of breaking at a stated voltage under prescribed conditions of use and behavior. —(IEC 60269-1)
Breaking Range	Breaking range is a range of prospective currents within which the breaking capacity of a fuse-link is assured. —(IEC 60269-1)
Pre-arcing Time / Melting Time	Interval of time between the beginning of a current large enough to cause a break in the fuse-element(s) and the instant when an arc is initiated. —(IEC 60269-1)
Arcing Time	Interval of time between the instant of the initiation of the arc in a fuse and the instant of final arc extinction in that fuse. —(IEC 60269-1)
Operating Time / Total Clearing Time	Sum of the pre-arcing time and the acting time. —(IEC 60269-1)
Power Dissipation (in a fuse-link)	Power released in a fuse-link carrying a stated value of electric current under prescribed conditions of use and behavior. —(IEC 60269-1)
Correction Factor of Rated Current	When the application environment and working conditions exceed the conditions specified in the standard, for the purpose of matching the working current and long service life of the fuse, the rating of fuse should be corrected by a correction factor. Consult the fuse manufacturer for specific application recommendations. —(IEC 60269-1)
Cut-off Current	Maximum instantaneous value reached by the current during the breaking operation of a fuse-link when it operates in such a manner as to prevent the current from reaching the otherwise attainable maximum. —(IEC 60269-1)
Cut-off Current Characteristic/ Let-through Current Characteristic	Curve giving the cut-off current as a function of the prospective current under stated conditions of operation. —(IEC 60269-1)
Nominal Discharge Current **/n**	Crest value of the current through the Fuse having a current waveshape of 8/20. —(IEC 61643-11)
Maximum Discharge Current **/max**	Crest value of a current through the Fuse having an 8/20 waveshape and magnitude according to the manufacturers specification I_{max} is equal to or greater than I_n. —(IEC 61643-11)

All Rights Reserved by Xiamen SET Electronics Co., Ltd. 2024-2026 V1.0