



Description

The Gas Discharge Tube (GDT) is a protective device which is filled with certain proportion of noble gas, or mixed gas or other discharge media in the space between metal electrodes and metalized ceramics, and then sealed at high temperature to form a single-gap or multi-gap switch type protective device. When the protected circuit or equipment suffers to surge, GDT will change from high impedance state to low impedance state and release the surge energy to reduce the residual voltage of the circuit, and then protect the equipment or humanbody from the hazard of transient overvoltage.


Features

- Fast Response
- Stable Performance Over Surface Life
- High Current Rating
- Low Capacitance
- High Insulation Resistance
- RoHS & REACH Compliant

Applications


- Class I and Class II SPD
- N-PE Mode Protection In AC Power

Part Number System

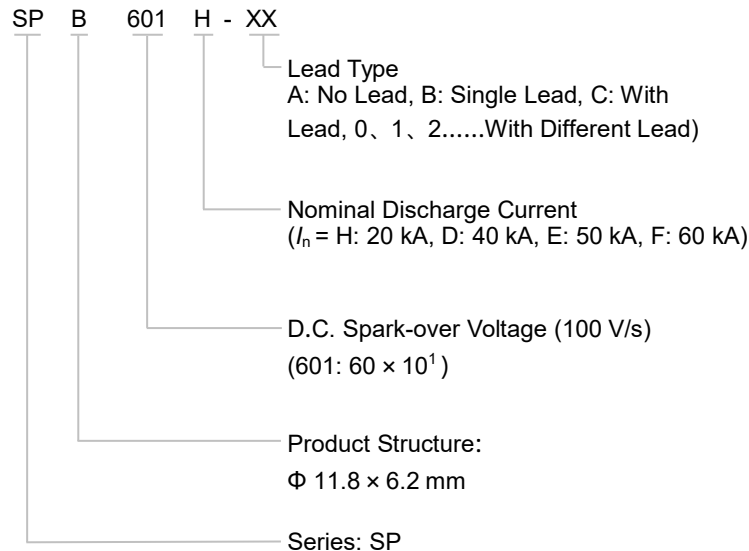

Agency Approvals

Agency	Standards	File No.
	UL1449	E322662
	TUV	On-going



Dimensions (mm)

D	L	W1	W
$\Phi 11.8 \pm 0.3$	16.8 ± 0.2	3.0	5.8
H	L1	h	
6.2 ± 0.2	4.7	0.8	

Glossary



Item	Description
V_s	D.C. Spark-over Voltage The voltage at which the GDT sparks over with slowly increasing d.c. voltage. — (IEC 61643-311)
V	Impulse Spark-over Voltage The highest Voltage which appears across the terminals of a GDT in the period between the application of an impulse of given wave-shape and the time when current begins to flow. — (ITU-T K.12)
V_a	Arc Voltage Voltage drop across the GDT during arc current flow. — (IEC 61643-311)
V_{gl}	Glow Voltage The peak value of the voltage drop across the GDT when a glow-current is flowing, It is sometimes called the glow mode voltage. — (ITU-T K.12)
8/20 μs	8/20 Current Impulse Current impulse with a nominal virtual front time of 8 μ s and a nominal time to half-value of 20 μ s. — (IEC 61643-11)
10/350 μs	10/350 Current Impulse Current impulse with a nominal virtual front time of 10 μ s and a nominal time to half-value of 350 μ s. — (IEC 61643-11)
1.2/50 μs	1.2/50 Voltage Impulse Voltage impulse with a nominal virtual front time of 1.2 μ s and a nominal time to half-value of 50 μ s. — (IEC 61643-11)
I	Alternating Discharge Current The r.m.s. value of an approximately sinusoidal alternating current passing through the gas discharge tube. — (ITU-T K.12)
I_n	Nominal Discharge Current Crest value of the current through the GDT having a current waveshape of 8/20 μ s. — (IEC 61643-11)
I_{max}	Maximum Discharge Current Crest value of a current through the GDT having an 8/20 μ s waveshape and magnitude according to the manufacturers specification. I_{max} is equal to or greater than I_n . — (IEC 61643-11)

GDT

GDT

I_{imp}	<p>Impulse Discharge Current Crest value of a discharge current through the SPD with specified charge transfer Q and specified energy W/R in the specified time. — (IEC 61643-11)</p>
U_p	<p>Voltage Protection Level Maximum voltage to be expected at the SPD terminals due to an impulse stress with defined voltage steepness and an impulse stress with a discharge current with given amplitude and waveshape. — (GB 18802.11、IEC 61643-11)</p>
U_C	<p>maximum r.m.s. voltage Which may be continuously applied to the SPD's mode of protection. — (IEC 61643-11)</p>
I_f	<p>follow current Peak current supplied by the electrical power system and flowing through the SPD after a discharge current impulse. — (IEC 61643-11)</p>
<i>class I</i>	<p>class I tests Tests carried out with the impulse discharge current I_{imp}, with an 8/20 current impulse with a crest value equal to the crest value of I_{imp}, and with a 1.2/50 voltage impulse. — (IEC 61643-11)</p>
<i>class II</i>	<p>class II tests Tests carried out with the nominal discharge current I_n, and the 1.2/50μs voltage impulse. — (IEC 61643-11)</p>



Specifications

Model	SPB091H - XX	SPB151H - XX	SPB351H - XX	SPB601H - XX		
Category	II	II	II	II	Units	
Application	N - PE	N - PE	N - PE	N - PE		
Nominal D.C. Spark-over Voltage (100 V/s)	90	150	350	600	V	
D.C. Spark-over Voltage (100 V/s)	72 ~ 108	120 ~ 180	280 ~ 420	480 ~ 720	V	
Impulse Spark-over Voltage @1 kV/μs	< 600	< 600	< 900	< 1400	V	
GB/T18802.311						
Nominal Impulse Discharge Current @8/20 μs I_n	20	20	20	20	kA	
Maximum Impulse Discharge Current @8/20 μs I_{max}	40	40	40	40	kA	
Class II (Comply with IEC61643-11)						
Max Continuous Operating Voltage U_c 50/60 Hz	-	-	110	255	Vrms	
Follow Current Cut-off Ability AC 50/60 Hz I_f	-	-	100	100	Arms	
Nominal Discharge Current @8/20 μs I_n	-	-	20	20	kA	
Maximum Discharge Current @8/20 μs I_{max}	-	-	40	40	kA	
Insulation Resistance (100 VDC)	> 1000	> 1000	> 1000	> 1000	MΩ	
Capacitance at 100 kHz	< 5.0	< 5.0	< 5.0	< 5.0	pF	
Agency Approvals	UL1449		●	○	●	●
	TUV		○	○	○	○

GDT

GDT

Specifications


Model	SPB801H - XX		SPB102H - XX		SPB152H - XX		SPB202H - XX		Units
Category	II		II		II		II		
Application	N - PE		N - PE		N - PE		N - PE		
Nominal D.C. Spark-over Voltage (100 V/s)	800		1000		1500		2000		V
D.C. Spark-over Voltage (100 V/s)	640 ~ 960		800 ~ 1200		1200 ~ 1800		1600 ~ 2400		V
Impulse Spark-over Voltage @1 kV/μs	< 1600		< 2000		< 2800		< 4000		V
GB/T18802.311									
Nominal Impulse Discharge Current @8/20 μs I_n	20		20		20		20		kA
Maximum Impulse Discharge Current @8/20 μs I_{max}	40		40		40		40		kA
Class II (Comply with IEC61643-11)									
Max Continuous Operating Voltage U_c 50/60 Hz	255		275		320		440		Vrms
Follow Current Cut-off Ability AC 50/60 Hz I_f	100		100		100		100		Arms
Nominal Discharge Current @8/20 μs I_n	20		20		20		20		kA
Maximum Discharge Current @8/20 μs I_{max}	40		40		40		40		kA
Insulation Resistance (100 VDC)	> 1000		> 1000		> 1000		> 1000		MΩ
Capacitance at 100 kHz	< 5.0		< 5.0		< 5.0		< 5.0		pF
Agency Approvals	UL1449		●	●	●	○			
	TUV		○	○	○	○			

Notes: Pin type can be customized.


GDT

GDT


Reference Curve for Spark-over Voltage (Refer to 230 VDC)

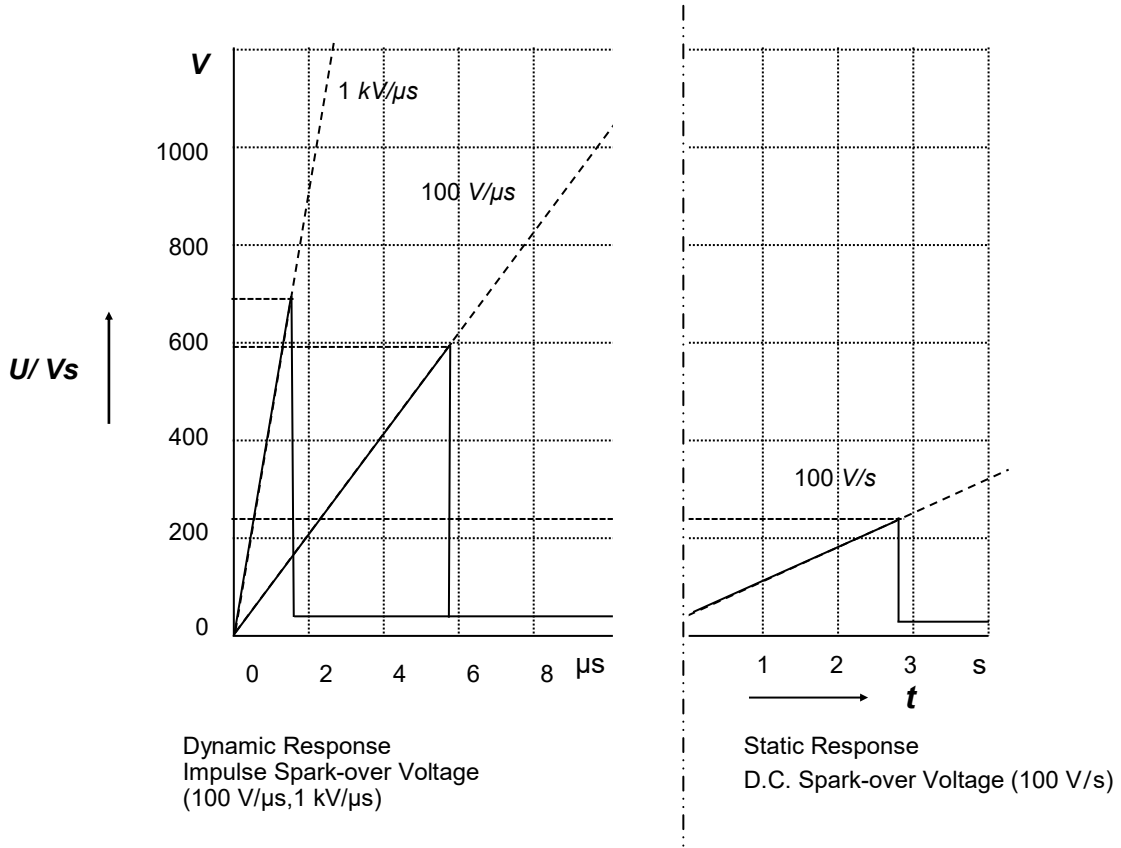

Reference Curve for Impulse Discharge Current

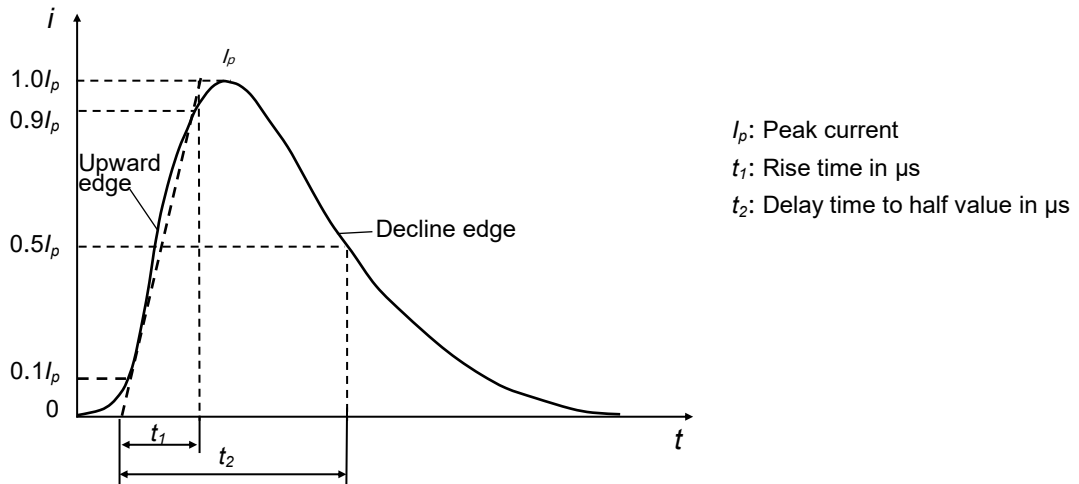


Electrical Characteristics

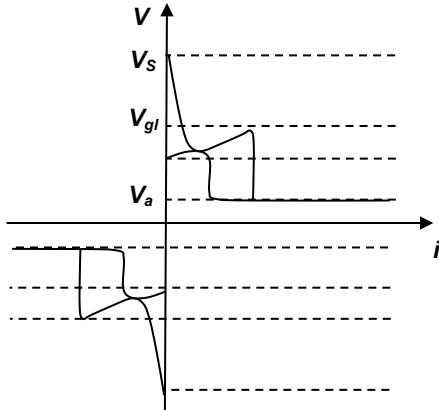

Relationship between Current and Voltage

- V_s : Spark-over Voltage
- V_{gl} : Glow Voltage
- V_a : Arc Voltage
- G : Glow Mode
- A : Arc Mode

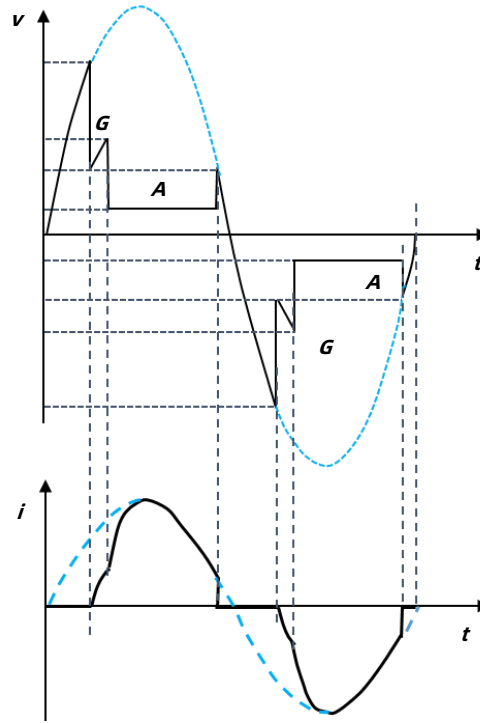


Time Variation Patterns of Voltage and Current

GDT


GDT

Application Example

AC Power Protection

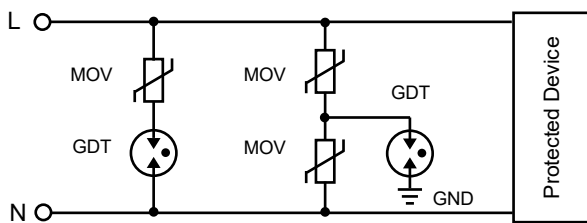

DC Power Protection

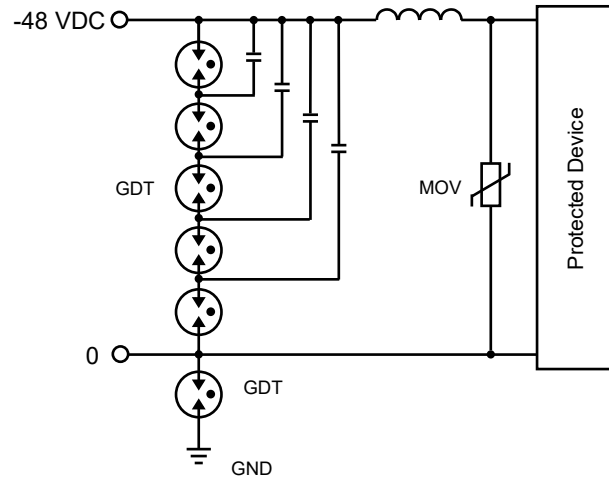


Recommended Hand-soldering Parameters

Items	Condition
Soldering Iron Temperature	350 °C (Max.)
Soldering Time	4 s (Max.)
Space between soldering point and product body	2 mm (Min.)

GDT

GDT

Wave Soldering Parameters (For Reference Only)

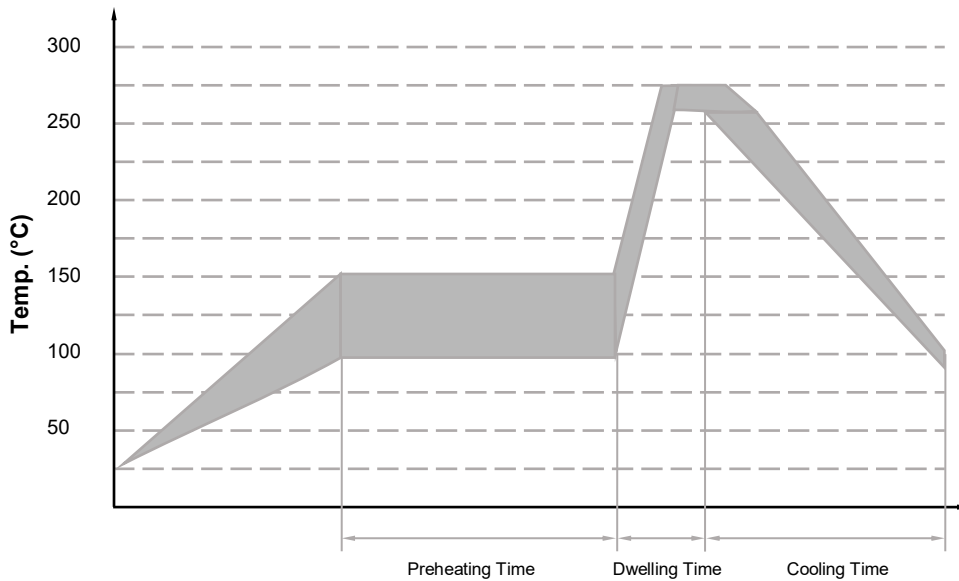


Item	Temp. (°C)	Time (s)
Preheating	90 to 150	< 150
Dwelling	255 to 280	3 to 10

Packaging Information

PC Box Package

Item	PC Box	Inner Box	Carton
Dimensions (mm)	215 × 205 × 16	230 × 210 × 98	440 × 230 × 250
Quantity (PCS)	144	720	2880

Notes: Packaging dimensions and quantity are for reference only.

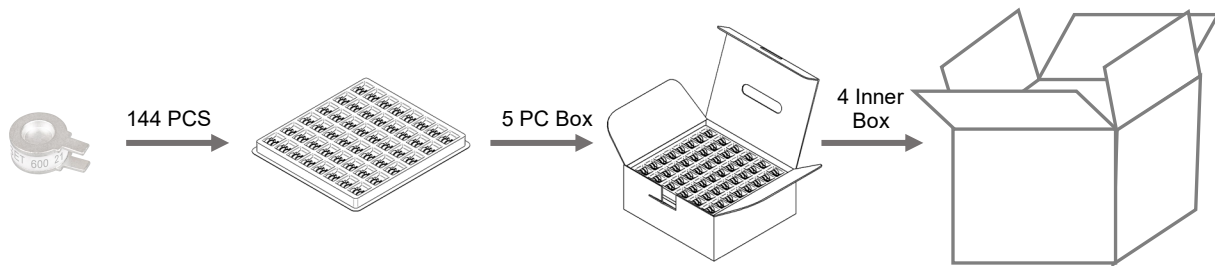

Please refer to the specifications for the packaging details.



ATTENTION

Usage

1. Do not operate GDT in power supply networks, whose maximum operation voltage exceeds the minimum spark-overvoltage of the GDT.
2. The GDT may become hot in the event of longer periods of current stress (burn risk). In the event of overload the connectors may fail or the component may be destroyed.
3. If the contacts of GDT are defective, current load can cause sparks and loud noises.
4. When air pressure is from 55 kPa to 106 kPa. The relative altitude shall be +5000 m to -500 m.

Replacement

The GDT is a non-repairable product. For safety sake, please use equivalent GDT for replacement.

Storage

The packaged GDT should be placed in a dry, ventilation and non-corrosive environment.

Installation Position

Do not install the GDT in a touchable position.

Mechanical Stress

Do not take violent action such as knocking when assembling, to avoid product failure.