TVS Diodes

Transient Voltage Suppression Diodes



SM8TxxCA Series



Description

Transient Voltage Suppressor (TVS) is a circuit protection component that either attenuates (reduces) or filters a transient voltage spike (overvoltage), TVS diodes provide critical protection by going into avalanche breakdown within no more than a few nanoseconds after a strike, clamping the transient voltage, and routing its current to the ground.

Applications

- Communication Equipment
- Security & Protection
- Industrial Control Equipment
- Power Supply
- Automotive Electronics
- New Energy
- Lightning Protection

Functional Diagram




Bi-Directional


Features

- AEC-Q101 Qualified
- Junction passivation optimized design passivated anisotropic rectifier technology
- T_J = 175 °C capability suitable for high reliability and automotive requirement
- Available in bi-directional polarity only
- Low leakage current
- Low forward voltage drop
- High surge capability
- Meets ISO16750-2 surge specification(varied by test condition)
- Meets MSL-1, per J-STD-020, LF maximum peak of 260 °C
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC

SETsafe | SET fuse

Package Outline Dimensions (DO-218AB)





	Millime	eters	Inches			
Symbol	Min.	Max.	Min.	Max.		
А	9.5	10.5	0.374	0.413		
В	8.3	8.7	0.327	0.342		
С	13.3	13.7	0.524	0.539		
D	15.0	16.0	0.592	0.628		
E	8.5	9.1	0.335	0.358		
F	9.5	10.1	0.374	0.398		
G	2.4	3.0	0.094	0.118		
Н	0.5	0.7	0.020	0.028		
J	2.7	3.7	0.106	0.146		
К	1.9	2.1	0.075	0.083		
L	4.7	5.1	0.185	0.201		
М	14.2	14.8	0.559	0.583		
N	3.5	4.1	0.138	0.161		
Р	1.6	2.2	0.063	0.087		



Maximum Ratings and Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified.)


Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 10/1000 μ S waveform	P _{PPM}	8000	w
Peak pulse power dissipation on 10/10000 µS waveform	P _{PPM}	6000	W
Peak Power Dissipation on Infinite Heat Sink at $T_{\rm C}\text{=}50~^\circ\text{C}$	PD	8.5	W
Peak pulse current with 10/1000 µS waveform	I _{PPM}	See page 5	Α
Operating junction and storage temperature range	T _J ,T _{STG}	-55 to 175	°C
Typical Thermal Resistance Junction to Lead	R _{θJL}	0.85	°C/W
Typical Thermal Resistance Junction to Ambient	R _{θJA}	11	°C/W

Note:


1. Non-repetitive current pulse derated above TA = $25 \degree C$.



Part Numbering System

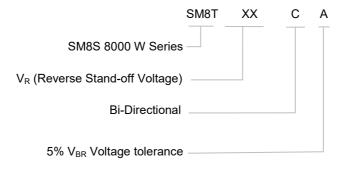

Marking





Electrical Characteristics (T_A=25 °C unless otherwise noted)Table 1

Part Number	Breako Volta V₀r(age	Test Current I₁	Reverse Stand-off Voltage V _R	Max. Reverse Leakage I₅@V₅		Max. Peak Pulse Current	Max. Clamping Voltage Vc@I _{PPM}
	Min	Мах					РРМ	
Uni	(V)		(mA)	(V)	(μA @ 25 °C) (μA @ 175 °C)		(A)	(V)
SM8T33CA	36.7	40.6	5	33	5	150	150	53.3
SM8T36CA	40.0	44.2	5	36	5	150	138	58.1

SETsafe | SET fuse

Performance Curve for Reference(T_A=25 °C unless otherwise noted)




FIGURE 1 Power Derating Curve



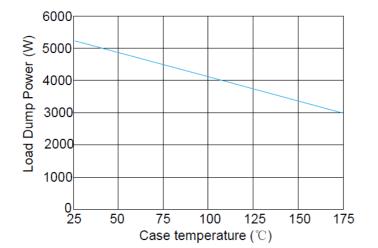


FIGURE 3 Load Dump Power Characteristics (10 mS Exponential Waveform)



Typical Transient Thermal Impedance



Pulse Waveform






FIGURE 4 Reverse Power Capability



SETsafe SET fuse

Soldering Parameters

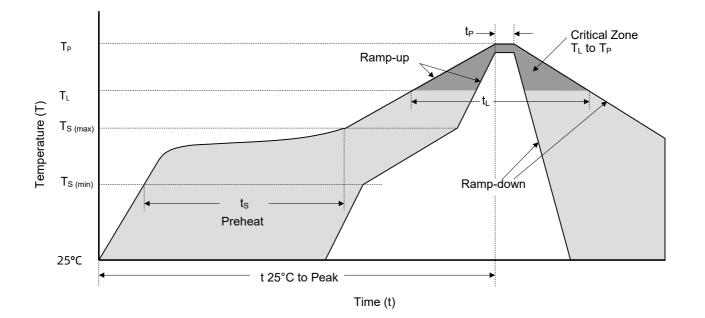

Reflowing Condition

Reflow Solderi	Reflow Soldering Parameters								
	Temperature Min (T _{S (min)})	150 °C							
Pre-heat	Temperature Max (T _{S (max)})	200 °C							
	Time (min to max) (t _s)	60 ~ 180 seconds							
Average Ramp Up Rate (L	iquidus Temp (TL) to Peak	3 °C / second max.							
T_{S} (max) to T_{L}	T _s (max) to T _L Ramp-up Rate								
Defleui	Temperature (T_L) (Liquidus)	217 °C							
Reflow	Time (min to max) (t_L)	60 ~ 150 seconds							
Peak Temp	erature (T _P)	260 ^{+0/-5} °C							
Time of within 5 °C of Act	ual Peak Temperature (t _P)	20 ~ 40 seconds							
Ramp-do	own Rate	6 °C / second max.							
Time from 25 °C to	8 Minutes max.								
Do Not	260 °C								



Packaging Information

Таре	Symbol	Dimension			
		Millimeters	Inches		
	A ₀	10.80 ± 0.30	0.425 ± 0.012		
<i>D</i> ₀ P ₀ P ₂	B ₀	16.13 ± 0.30	0.635 ± 0.012		
	С	330.00 ± 0.30	13.000 ± 0.012		
	D ₀	1.55 ± 0.20	0.061 ± 0.008		
	D ₁	1.55 ± 0.20	0.061 ± 0.008		
	E	1.75 ± 0.20	0.069 ± 0.008		
	E ₁	13.30 ± 0.20	0.524 ± 0.008		
	F	11.50 ± 0.20	0.453 ± 0.008		
←	P ₀	4.00 ± 0.20	0.157 ± 0.008		
	P ₁	16.00 ± 0.20	0.630 ± 0.008		
W ₁ Direction of Feed	P ₂	2.00 ± 0.20	0.079 ± 0.008		
	W	24.00 ± 0.20	0.945 ± 0.008		
	W1	25.85 ± 0.20	1.018 ± 0.008		

Part Number	Package	QTY (Reel)	Packaging Option	Packaging Specification
SM8TxxCA	DO-218AB	750 PCS	Tape & Reel 13" reel	EIA STD RS-481

TVS Diodes Transient Voltage Suppression Diodes



SM8TxxCA Series

Glossary

Item	Description
Vc	Clamping Voltage Voltage across TVS in a region of low differential resistance that serves to limit the voltage across the device terminals.
V _R	Reverse Stand-off Voltage Maximum voltage that can be applied to the TVS without operation. NOTE : It is also shown as V _{WM} (maximum working voltage (maximum d.c. voltage)) and known as rated stand- off voltage (V _{so}).
I _R	Reverse Leakage Current Current measured at V _{R.} NOTE : Also shown as I _D for stand-by current.
V _{BR}	Breakdown Voltage Voltage across TVS at a specified current I_{T} in the breakdown region.
I _{РРМ}	Rated Random Recurring Peak Impulse Current Maximum-rated value of random recurring peak impulse current that may be applied to a device.
$P_{M(AV)}$	Rated Average Power Dissipation Maximum-rated value of power dissipation resulting from all sources, including transients and standby current, averaged over a short period of time.
P _{PPM}	Rated Random Recurring Peak Impulse Power Dissipation Maximum-rated value of the product of rated random recurring peak impulse current (<i>I</i> _{PPM}) multiplies by specified maximum clamping voltage (<i>V</i> _C).
CJ	Capacitance Capacitance across the TVS measured at a specified frequency and voltage.
V _{FS}	Peak Forward Surge VoltagePeak voltage across an TVS for a specified forward surge current (IFS) and time duration.NOTE : Also shown as VF.
I _{FS}	Forward Surge Current Pulsed current through TVS in the forward conducting region. NOTE : Also shown as <i>I</i> _{F.}
$\alpha_{V(BR)}$	Temperature Coefficient of Breakdown Voltage The change of breakdown voltage divided by the change of temperature.
I _{PP}	Peak pulse Current Peak pulse current value applied across the TVS to determine the clamping voltage $V_{\rm C}$ for a specified wave shape.
Ι _τ	Pulsed D.C. Test Current Test current for measurement of the breakdown voltage V_{BR} . This is defined by the manufacturer and usually given in milliamperes with a pulse duration of less than 40 ms. NOTE : Also shown as I_{BR} .

---(GB-T 18802.321 / IEC 61643-321 / JESD210A)

TVS Diodes

Transient Voltage Suppression Diodes



SM8TxxCA Series



Usage

- 1. TVS must be operated in the specified ambient temp.
- 2. Do not clean the TVS with strong polar solvent such as ketone, esters, benzene and halogenated hydrocarbon, to avoid damaging the encapsulating layer.
- 3. Please do not apply severe vibration, shock or pressure to TVS, to avoid element cracking.

Replacement

- 1. If TVS is visually damaged, please replace it.
- 2. TVS is a non-repairable product. For safety sake, please use equivalent TVS for replacement.

Storage

- 1. Storage Temp. Range: (-55 to 150) °C.
- 2. Do not store the TVS at the high temp., high humidity or corrosive gas environment, to avoid influencing the solder- ability of the lead wires. The product shall be used up within 1 year after receiving the goods.

Environmental Conditions

- 1. TVS should not be exposed to the open air, nor direct sunshine.
- 2. TVS should avoid rain, water vapor or other condition of high temp. and high humidity.
- 3. TVS should avoid sand dust, salt mist, or other harmful gases.

Max. Typical Capacitance of TVS

The typical capacitance of TVS is listed in the specifications. Designers may refer to it when designing TVS in High frequency circuit.

Installation Mechanical Stress

- 1. Do not knock TVS when installing, to avoid mechanical damage.
- 2. Please do not apply severe vibration, shock or pressure to TVS, to avoid surface resin or element cracking.

	/	N											/	↑
	DO-214AA	0	0	ASMB	ASMB-VR	0	0	0	0	0	0	0	0	
Package Type	DO-214AB	0				ASMC	ASMC-VR	ASMD	A5.0SMD					Series
ackag	DO-214AC	ASMA	ASMA-VR	0	0	0	0	0	0	0	0	0	0	ries
	DO-218AB	0	0	0	0	0	0	0	0	SM8SxxA	SM8SxxCA	SM8TxxA	SM8TxxCA	$ \rightarrow $
Product Outline (mm)		2.10	5.04	2.30	5.40		2.34	7.94				5.00		
V F Revers	R / VWM (V) e Stand-off Voltage	5.8 ~ 468	5.0 ~ 440	5.8 ~ 553	5.0 ~ 440	5.8 ~ 51	5.0 ~ 4	140	12.0 ~ 170	10.0 ~ 43.0	12.0 ~ 43.0	20.0 ~ 43.0	33.0 ~ 36.0	
(10 Rate Por	PPPM (W) D/1000 μs) ed Peak ImPulse wer Dissipation	4	00	6	00	1	1500 300		5000		6600 8000			
	operating mperature (°C)			/		+150			****			o +175		

Automotive TVS Diodes (Surface Mount) Feature Overview

SM8TxxCA Series

SETsafe SET fuse

TVS Diodes Transient Voltage Suppression Diodes